



DISC TYPE DIN 1825

Do=5" (125mm) Di=1.75" (44,45mm)

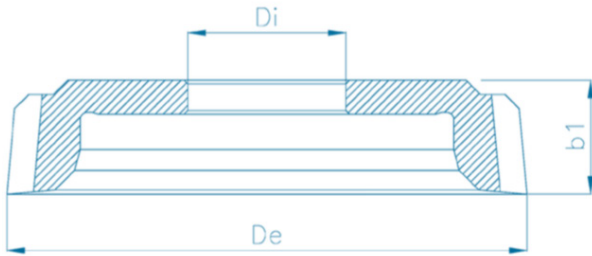

DIN 3972/II (20°)

Spur gear DIN 867 1.25/0.25/1.00

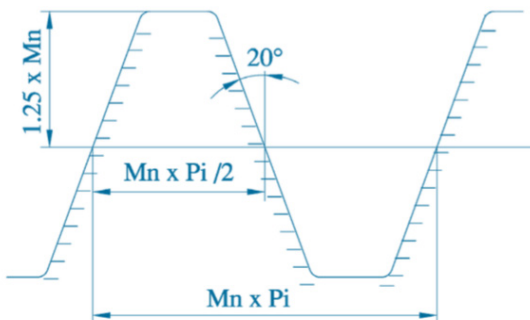

TSA ID	Mn	DP	Zo	De	b1
01-00600	1.000	25.40	124	127	22
01-00602	1.250	20.32	100	128	22
01-00604	1.500	16.93	84	130	22
01-00605	1.750	14.51	72	130	24
01-00606	2.000	12.70	64	133	26
01-00607	2.250	11.29	56	132	26
01-00608	2.500	10.16	50	131	26
01-00609	2.750	9.24	46	133	26
01-00610	3.000	8.47	42	134	26
01-00611	3.500	7.26	36	135	26
01-00612	4.000	6.35	32	138	26
01-00613	4.500	5.64	28	137	26
01-07954	5.000	05.08	25	138	28
01-15530	5.500	4.62	23	141	28
01-00616	6.000	4.23	22	148	28
01-15467	6.500	3.91	20	147	30
01-00617	7.000	3.63	18	144	30
01-07249	7.257	3.50	18	149	30
01-15468	7.500	3.39	17	147	32
01-00618	8.000	3.18	16	149	32
01-08713	9.000	2.82	14	149	34
01-15189	10.00	2.54	13	158	34

Mn=Normal Module; DP=Diametral Pitch; Zo=Teeth Number;
De=Ext. Diameter; b1=Thickness

Material

All common PM HSS

Coating

All common coatings

Quality

DIN 1829 A and AA

Features

Customized drawings on request